




Project Name: _____

HIB LIGHT

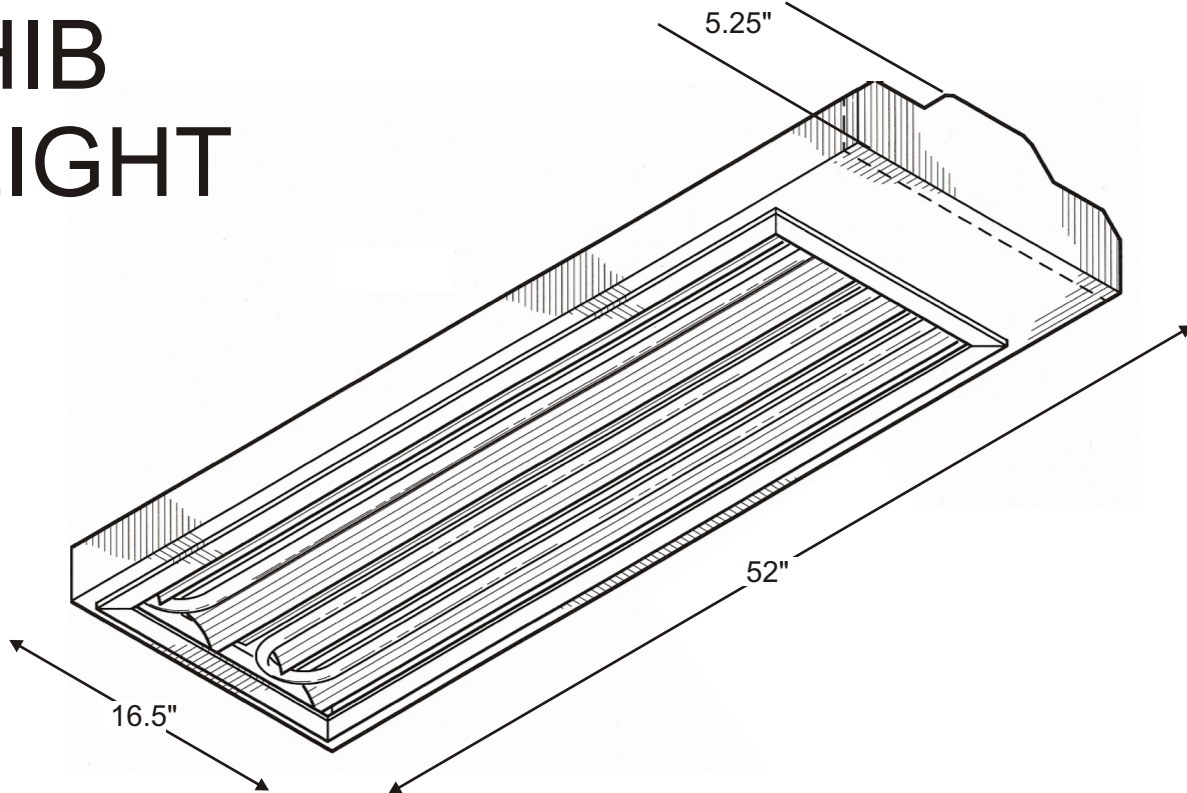

SQ- HIB - CC - 120 - 45 - N

SPECIFICATION GUIDE

	120 VOLT	D - DIMMING
	240 VOLT	N - NON-DIMMING
	277 VOLT	
<u>MODEL SERIES</u>	<u>VOLTAGE</u>	<u>CONTROL</u>
SQ- HIB	CC	120 - 45 - N
<u>LAMPING</u>	<u>COLOR</u>	
COLD CATHODE	24 - 2400ø K	
	28 - 2800ø K	
	30 - 3000ø K	
	35 - 3500ø K	
	45 - 4500ø K	
	65 - 6500ø K	

GENERAL NOTES

- 1) AVAILABLE FOR DIMMING AND NON-DIMMING APPLICATIONS. IF DIMMING AND ASSOCIATED CONTROLS BY OTHERS.
- 2) STANDARD LIGHTING COLOR OPTIONS: ONE OF SQUARE 1 PRECISION LIGHTING® STANDARD WHITE COLORS
- 3) VERIFY PRIMARY VOLTAGE FOR COMPATIBILITY.
- 4) FINISH WHITE, UNLESS OTHERWISE SPECIFIED.
- 5) INPUT: 134 WATTS